

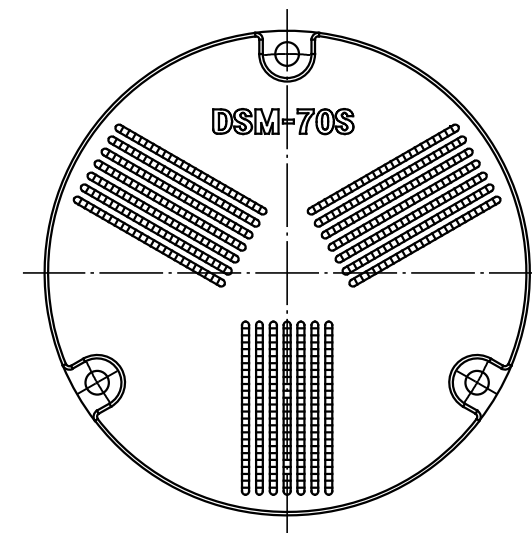
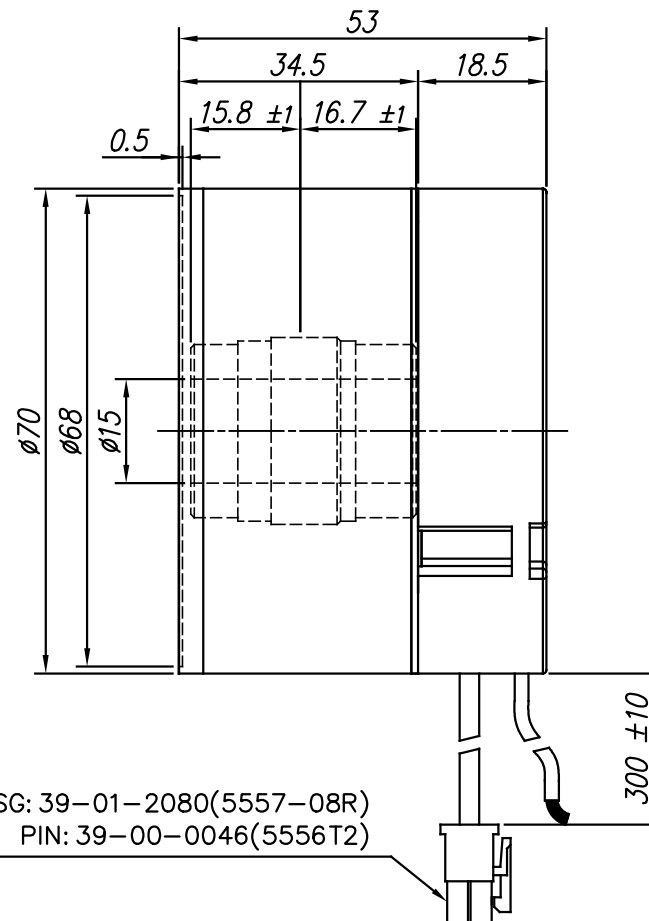
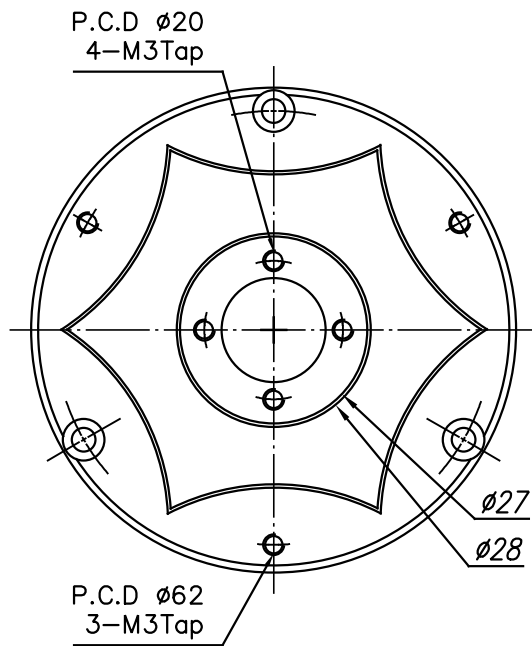


Table.1 Connector Interface (Motor)

Pin No.	COLOR	FUNCTION	LEAD WIRE
1	BLACK	GND	UL1061 AWG 26
2	BLUE	Motor W	UL 1061 AWG 22
3	GREEN	Motor V	
4	YELLOW	Motor U	
5	RED	VCC	UL 1061 AWG 26
6	BROWN	Hall C	
7	GRAY	Hall B	
8	WHITE	Hall A	

Fig.1 Connecetor




Table.2 Encoder

Lead Wire : UL 1061 AWG28
(F.G Wire : UL 1061 AWG22)

PIN NO.	COLOR	MEI	MEI (LDP)	MEC
1	RED	VCC	VCC	VCC
2	BLACK	GND	GND	GND
3	BROWN	ENC A	ENC A	ENC A
4	BLUE	-	ENC $\bar{A}$	-
5	GRAY	ENC B	ENC B	ENC B
6	GREEN	-	ENC $\bar{B}$	-
7	YELLOW	ENC Z	ENC Z	ENC Z
8	ORANGE	-	ENC $\bar{Z}$	Tx / SSCK
9	WHITE	PWM	-	Rx / SSD
10	BLACK	F.G	F.G	F.G

REV.	DATE	DESCRIPTION	DRWN
MATERIAL	-	PLATING	-
SCALE	N/S	PAPER	A4
QUANTITY	-		
DWG NO.	DSM-701-24V-A-M-ENC		
DIMENSION			mm



(주)디엔지워드
D&J WITH Co.,Ltd

SUBJECT

DSM-701
(Standard module type)

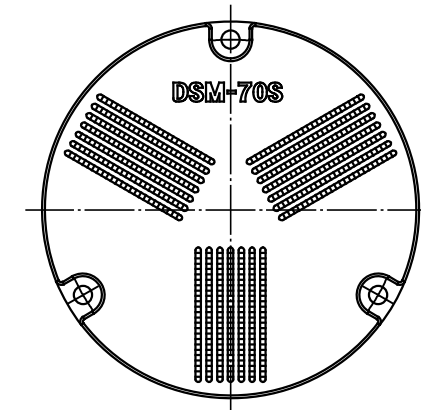
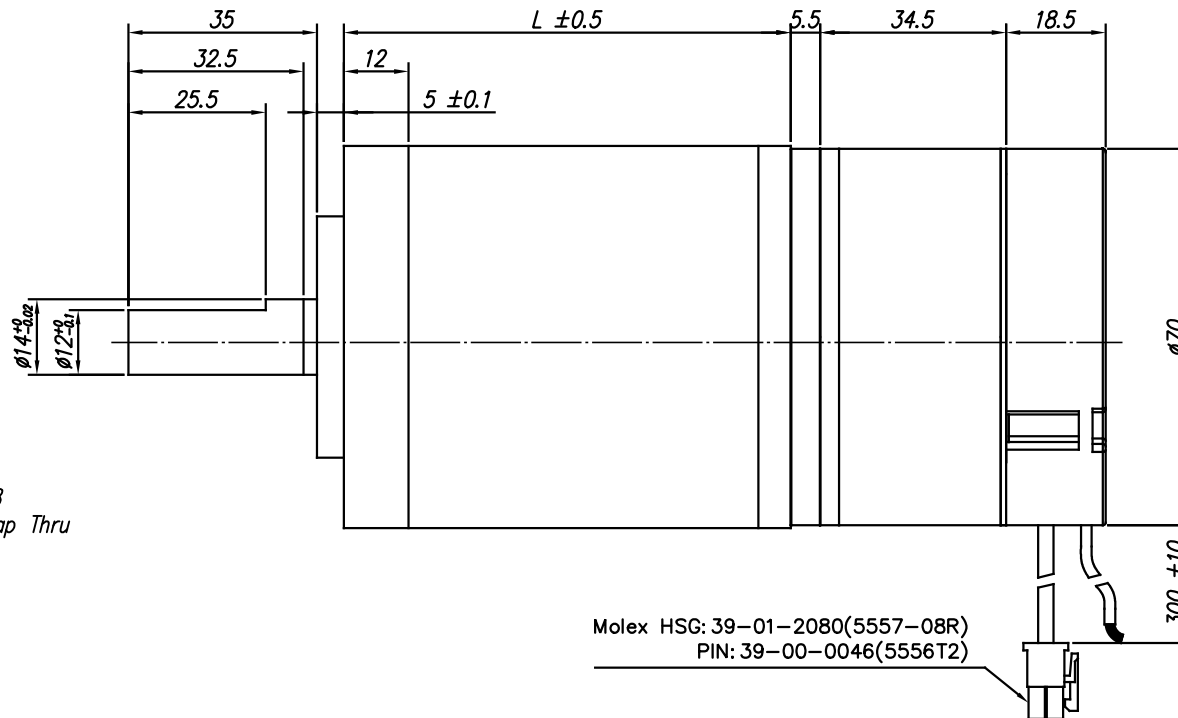
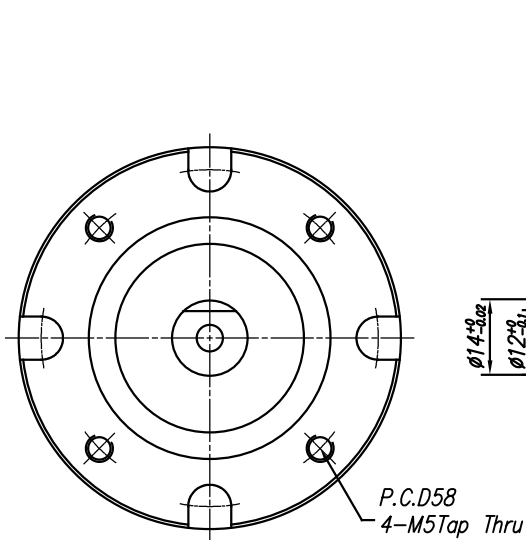


Fig.1 Connector




Table.3 Reduction ratio

Reduction ratio	1/4	1/13	1/16	1/20	1/50	1/60	1/75	1/91	1/102	1/126	1/189	1/242	1/300	1/363	1/414	1/493	1/543	1/611
Length (L)	49.3	65.8		84				99.5										

Table.1 Connector Interface (Motor)

Pin No.	COLOR	FUNCTION	LEAD WIRE
1	BLACK	GND	UL1061 AWG 26
2	BLUE	Motor W	UL 1061 AWG 22
3	GREEN	Motor V	
4	YELLOW	Motor U	
5	RED	VCC	UL 1061 AWG 26
6	BROWN	Hall C	
7	GRAY	Hall B	
8	WHITE	Hall A	

Table.2 Encoder

Lead Wire : UL 1061 AWG28
(F.G Wire : UL 1061 AWG22)

PIN NO.	COLOR	MEI	MEI (LDP)	MEC
1	RED	VCC	VCC	VCC
2	BLACK	GND	GND	GND
3	BROWN	ENC A	ENC A	ENC A
4	BLUE	-	ENC A	-
5	GRAY	ENC B	ENC B	ENC B
6	GREEN	-	ENC B	-
7	YELLOW	ENC Z	ENC Z	ENC Z
8	ORANGE	-	ENC Z	Tx / SSCK
9	WHITE	PWM	-	Rx / SSD
10	BLACK	F.G	F.G	F.G

REV.	DATE	DESCRIPTION	DRWN
MATERIAL	-	PLATING	-
SCALE	N/S	PAPER	A4
QUANTITY	-		
DWG NO.	DSM-701-24V-A-IG71-ENC		
		DIMENSION	mm

(주)디엔지위드
D&J WITH Co.,Ltd

SUBJECT
DSM-701
(IG-71)